

## STANDARD WAX FOR FLAT HEAD PRINTERS


COMPETITIVENESS

GOOD PRINTING QUALITY


RECEPTOR MULTI-COMPATIBILITY

### PRINTING QUALITY


Blackness Macbeth D19C




Sharpness



0°Barcode




90°Barcode




### SENSITIVITY

Printing Speed

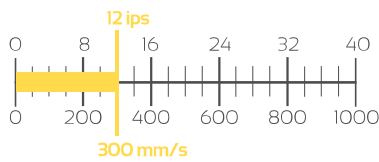

Energy




Receptor Compatibility

Uncoated papers	● ● ●
Coated papers	● ● ●
High gloss papers	● ●
Synthetics	●


### RESISTANCES

Mechanical Resistance


Crockmeter, 680 g/cm<sup>2</sup>



Heat Resistance

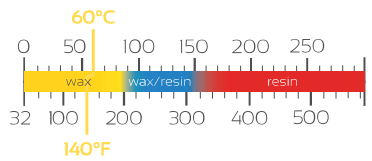

Other Resistances

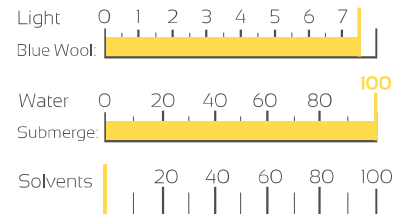

# THERMAL TRANSFER RIBBON

## STANDARD WAX FOR FLAT HEAD PRINTERS

### APPLICATION FIELDS

(If your application is not among the ones below, please contact us.)




### RIBBON SPECIFICATIONS

**Backcoating:**  
Silicon based.  
Friction coefficient:  
Kd < 0.2.

**Ink:**  
Wax.  
Melting point:  
65°C / 149°F  
(ARMOR procedure).

**PET film:**  
Thickness: 4.5 µm.

Backcoating →  
PET film →  
Ink layer(s) →



**Storage:**  
12 months, 5-35°C (40-95°F),  
20-80 % Humidity Rate.

**Ribbon:**  
Thickness (black): < 8 µm.  
The ribbon is anti static build-up  
treated.

### CERTIFICATIONS

REACH / SVHC Free: 1907/2006/EC

Food Contact Approved: 1935/2004/EC

Heavy metals: - 2002/95/EC  
- 2002/96/EC  
- 2011/65/EC

California Proposition 65

Halogen Free



### COLOUR RANGE

● Black

### SUSTAINABLE DEVELOPMENT



Quality, Health/Safety, Environment :



ISO 9001



ISO 14001



OHSAS 18001



**Responsible Care:** International Council of Chemical Associations' charter towards constant improvements in health, safety and environment.



**Global Compact:** UN initiative inviting companies to apply fundamental ethical and environmental values.