


Barcode Slot Reader

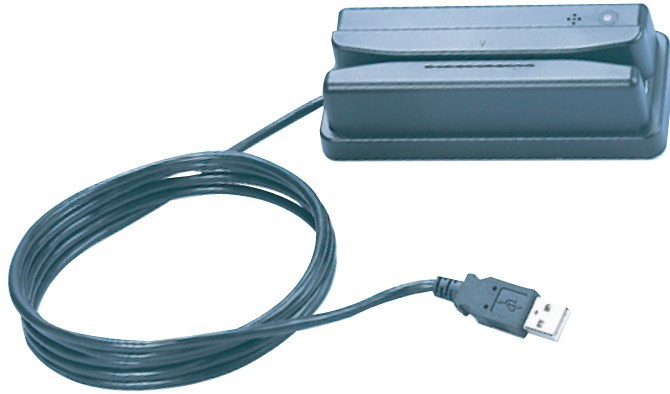

Optical

▶ Light Source	Infrared: 930 nm LED Visible light: 660 nm LED
▶ Sensor	Photo diode
▶ Depth of field	2 mm
▶ Resolution	6 mils (0.15mm) min
▶ Print Contrast	0.6 minimum
▶ Scan Speed	50 ~ 700mm/Sec
▶ M.T.B.F	25000 Hours

Functionality

▶ Symbologies	Code 39 standard and full ASCII, EAN-13, UPC-A, EAN-8, UPC-E, standard 2 of 5, Code 128, Code 93, MSI, Code 11, Code 32, Delta Code, Label Code, Plessey Code, Codabar
▶ Interface	USB, Keyboard wedge, RS232, TTL (undecoded)

Mechanical and Electrical

▶ Dimensions:	128 mm (L) x 53 mm (W) x 33 mm (H)
▶ Weight:	180 g
▶ Power consumption	35 mA for TTL 5V DC 5% 70mA for Decoded version
▶ Beep sound volume	>70dB

Environmental:

▶ Operating Temperature	0° to 50°C
▶ Storage Temperature	-20° to 60°C
▶ Humidity	0% to 95% RH non-condensing
▶ Mechanical Shock	5 ft. (1.5 m) drop on concrete

MS146 Barcode Slot Reader

The MS146 bar code slot reader applies for time control, security access, or attendance control applications with pre-printed forms and scanning cards or badges. It is also an ideal economic device either for desk-top or for multi-direction for side-mounted applications on the wall, which interface with all popular devices. The MS146 slot reader has a wide slot and features perfect read rates on high density labels with its resolution of 0.15mm. It's sealed optical system with IP54 rugged housing allows MS146 read the label in the harshest industrial environment without degrading its performance.

Features

- Sealed optical system with IP54 rugged housing
- Wide bar code slot with flexible reading angle and higher resolution
- Multi-direction for flexibility of installation
- User configurable via PC programming
- Compatibility with all popular computer and devices
- Provide desktop or side-mounted application on the wall
- Suitable for different cards of different dimension and printing qualities
- Available with TTL, keyboard wedge RS232 and USB interfaces
- Advanced Data Editing
- 50 mm to 700 mm/sec Scan Rate
- 6 mil minimum resolution

www.unitech-adc.com

Unitech America <http://www.unitech-adc.com> Unitech Europe <http://www.unitech-europe.nl> Unitech Japan <http://www.unitech-japan.co.jp>

Unitech APAC <http://www.unitech-adc.com> Unitech China <http://adc-utt.unitech.com.tw>

Specifications subject to change without notice. Copyright 2001 Unitech Electronics Co., Ltd. All rights reserved. Unitech is a registered trademark of Unitech Electronics Co., Ltd. Microsoft is a registered trademarks of Microsoft Corporation.

All products and company names are trademarks, service marks or registered trademarks of their respective owners.